

FIG. 1

FIG.2

FORMAT LANGUAGE PATTERN	MEANING
URL=<//	REJECT REQUEST HAVING TOP OF URL COINCIDENT WITH “//”
CGI==phf ARG=<Qname=root%OA	REJECT REQUEST HAVING CGI NAME OF “phf” AND TOP OF FACTOR OF CGI COINCIDENT WITH “Qname=root%OA”
URL<>“.¥.¥..¥..”	REJECT REQUEST HAVING URL INCLUDING “.¥.¥..¥..”
CGI>=.htr	REJECT REQUEST HAVING END OF CGI COINCIDENT WITH “.htr” , I.E., REJECT REQUEST HAVING CGI WITH EXTENSION “.htr”

FIG.3

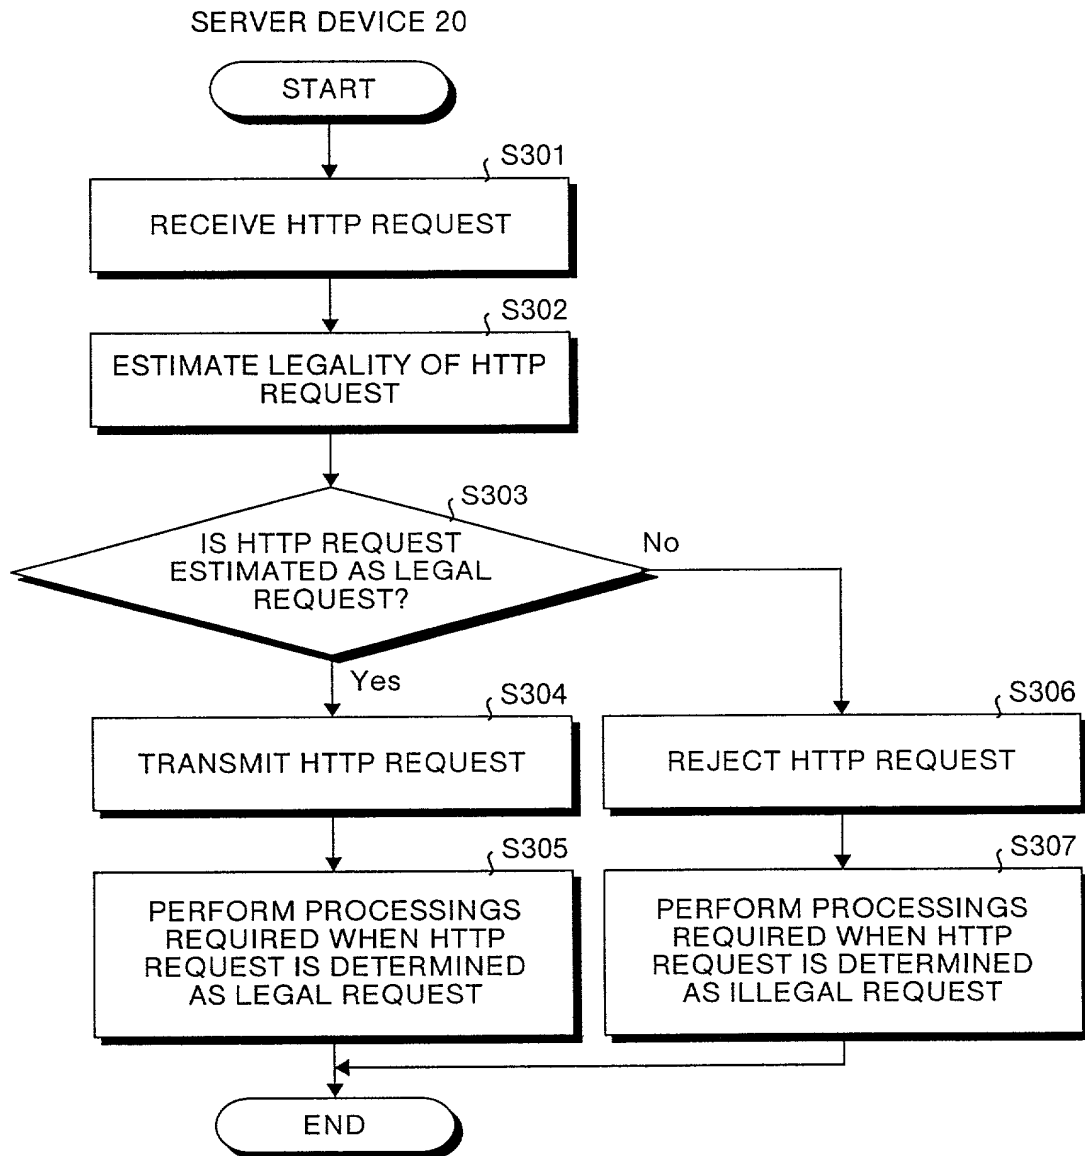


FIG.4

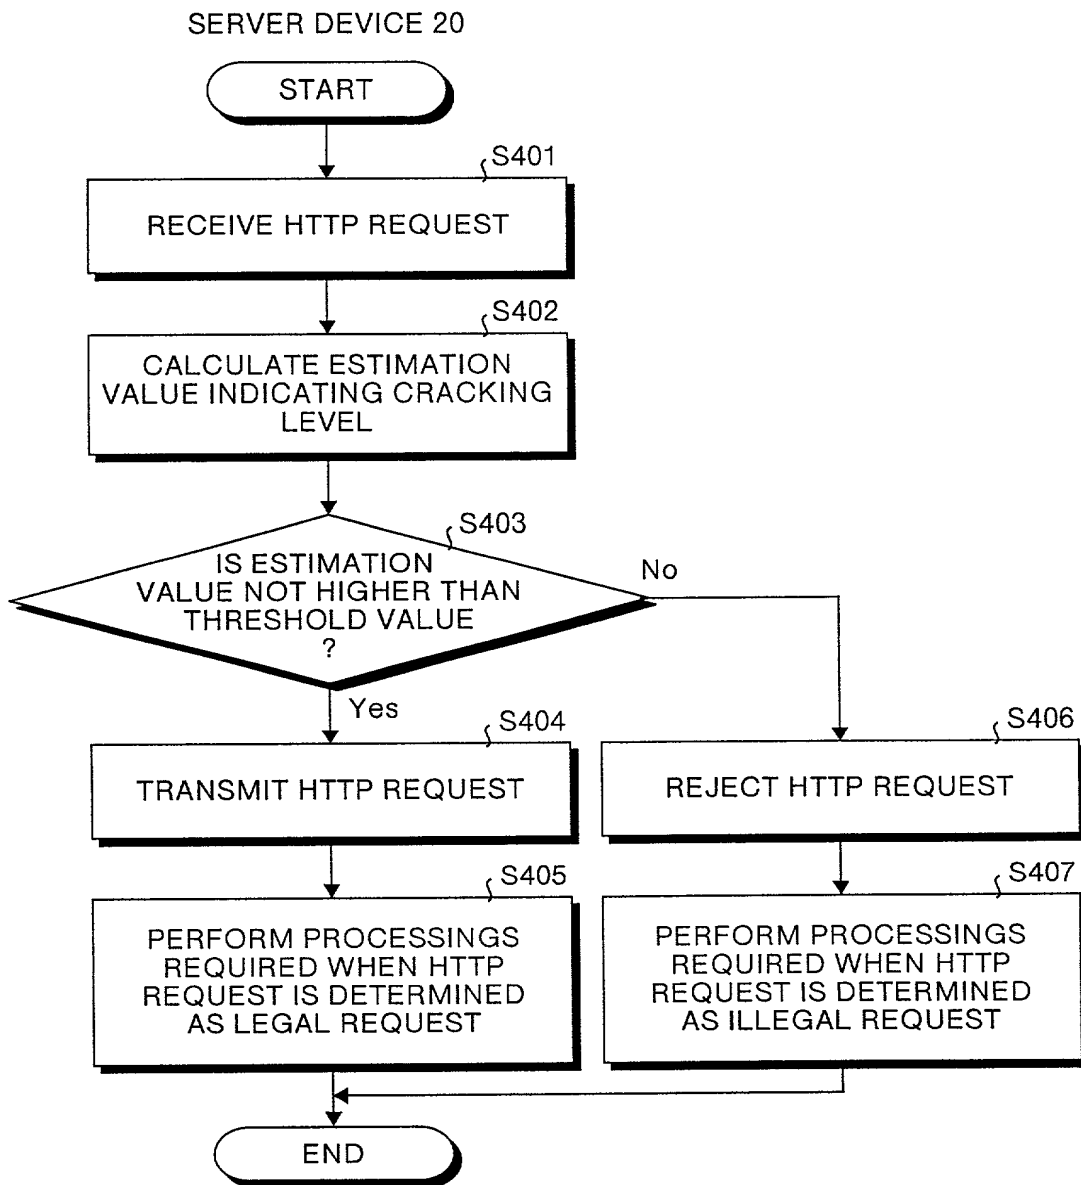


FIG.5

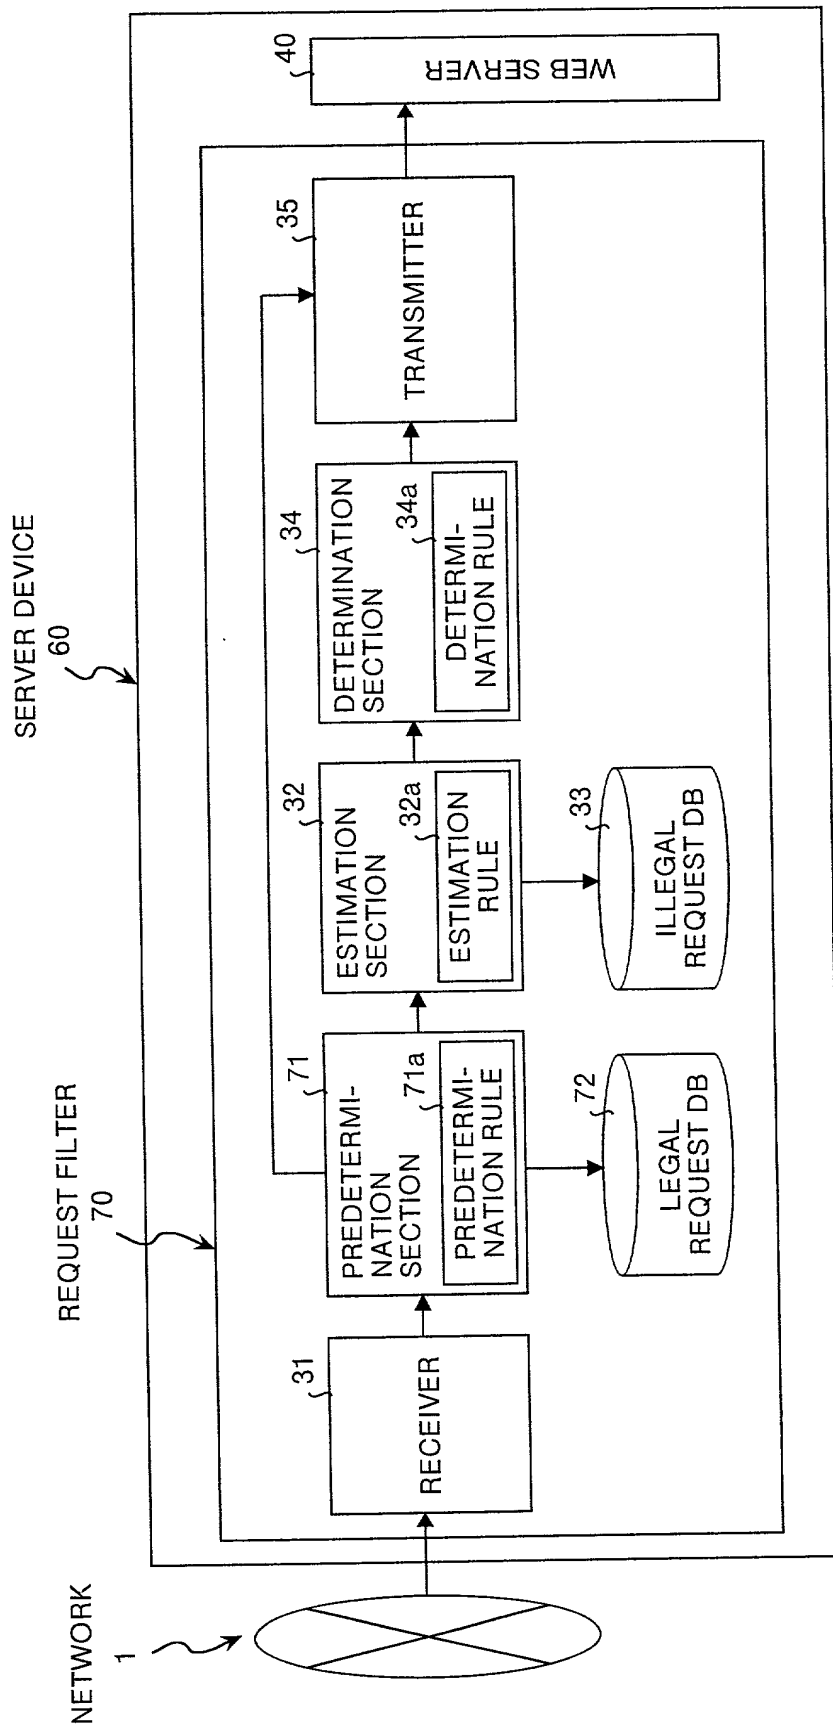


FIG.6

SERVER DEVICE 60

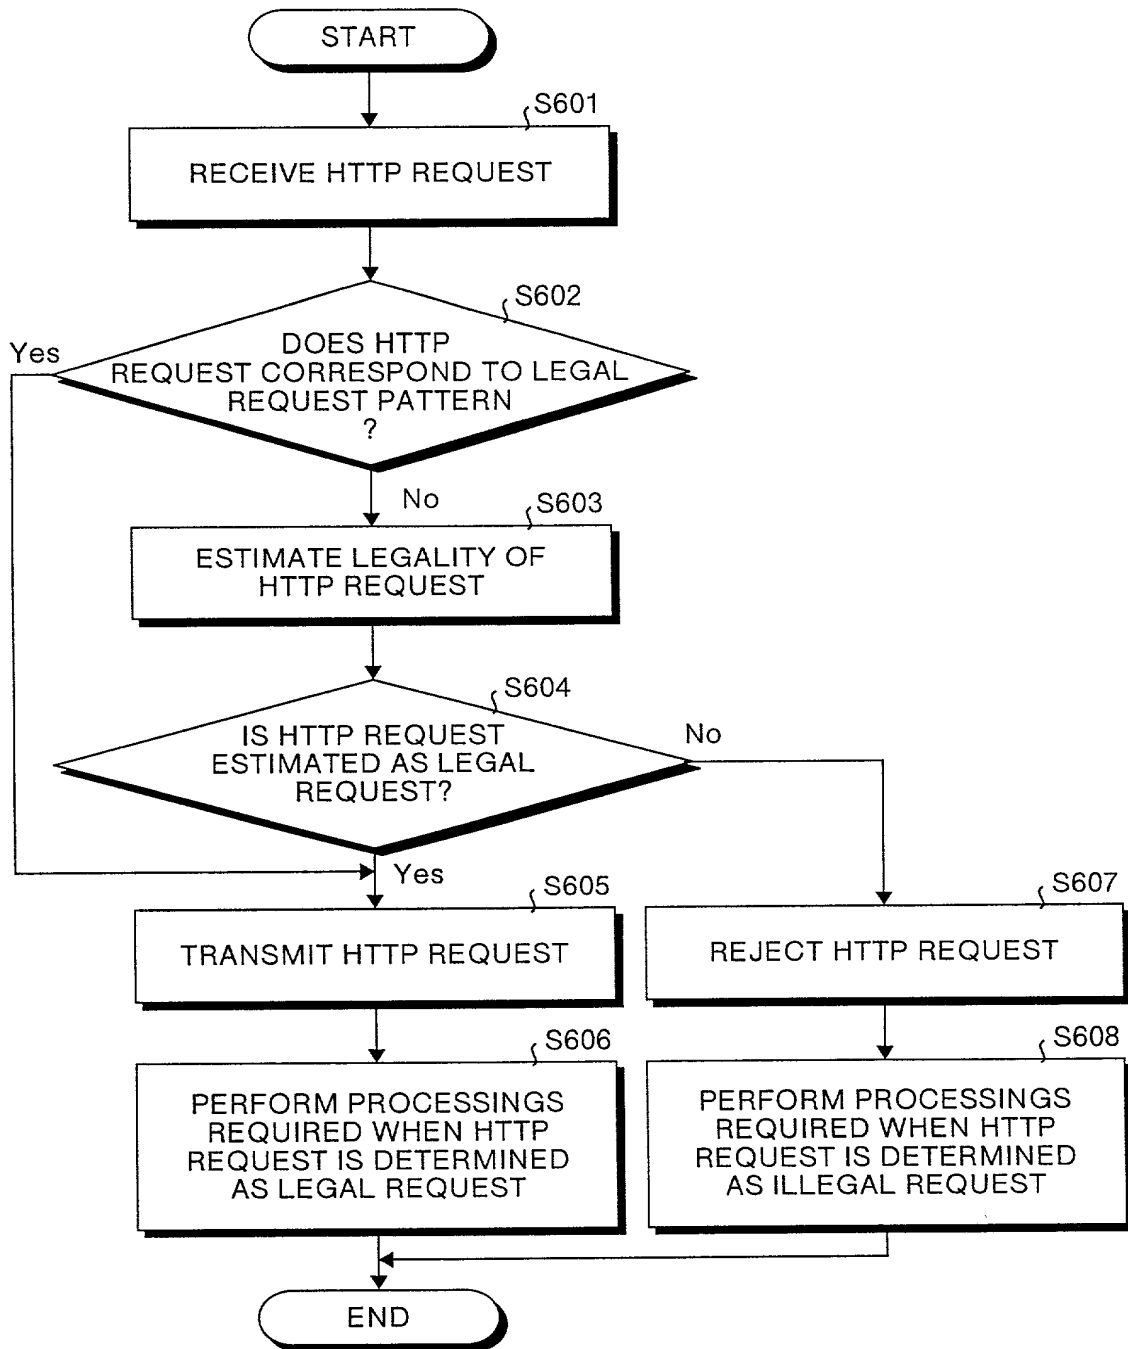


FIG.7

80 SERVER DEVICE

81 REQUEST FILTER

NETWORK
1

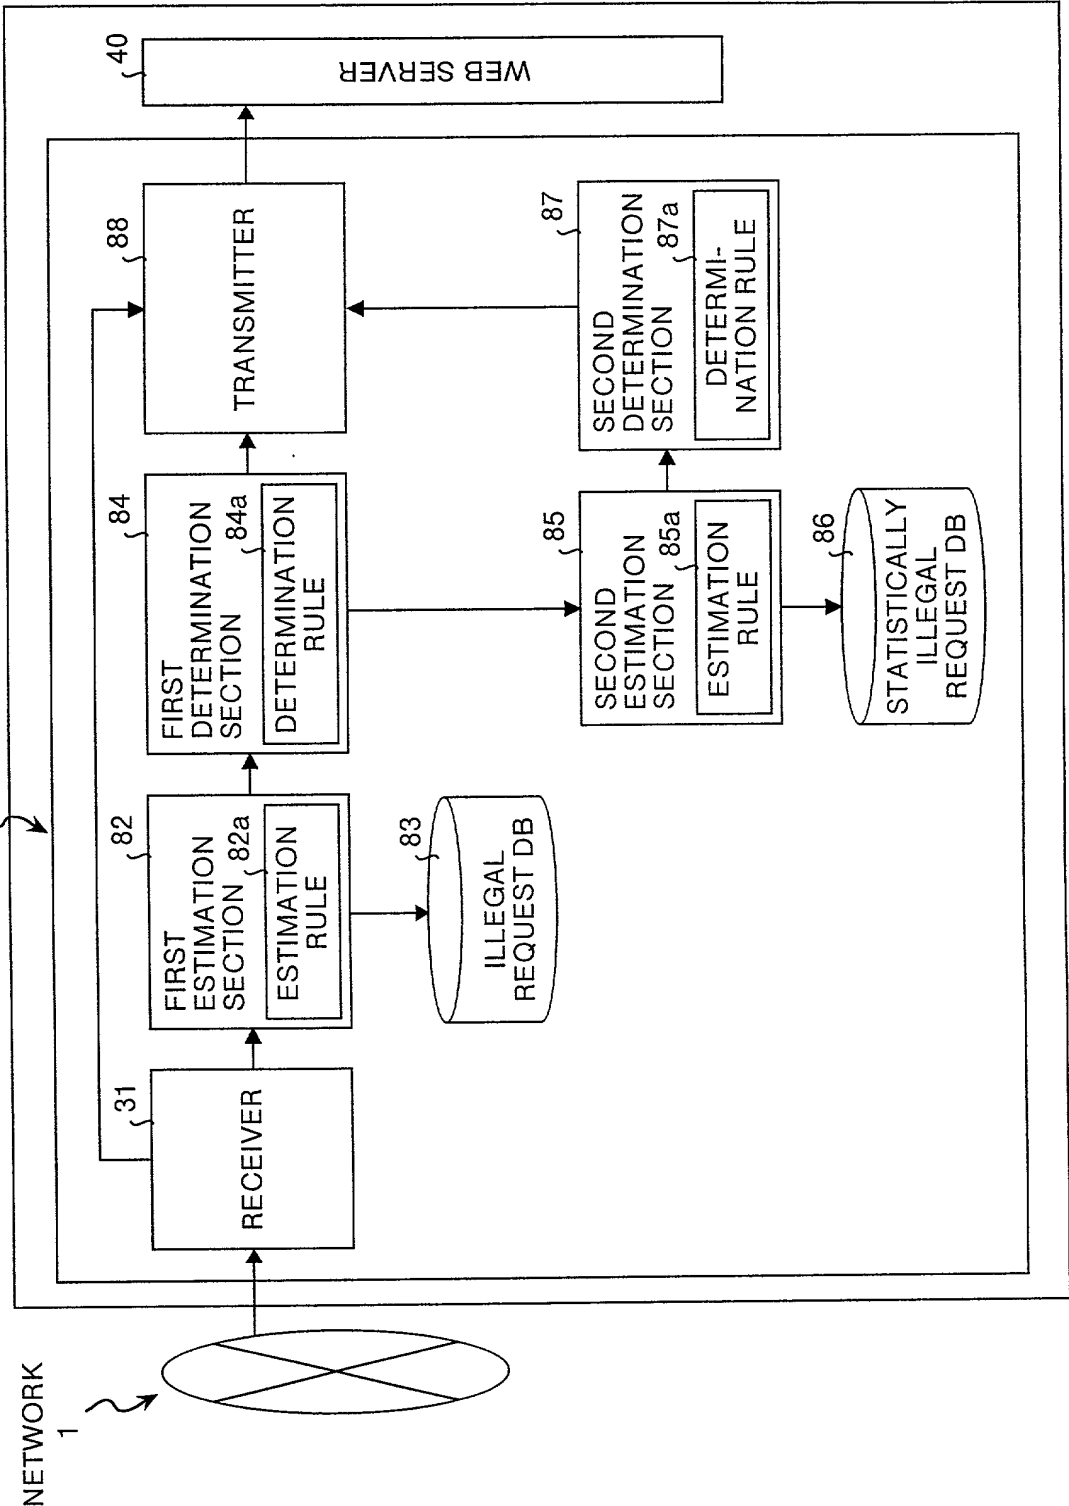


FIG.8




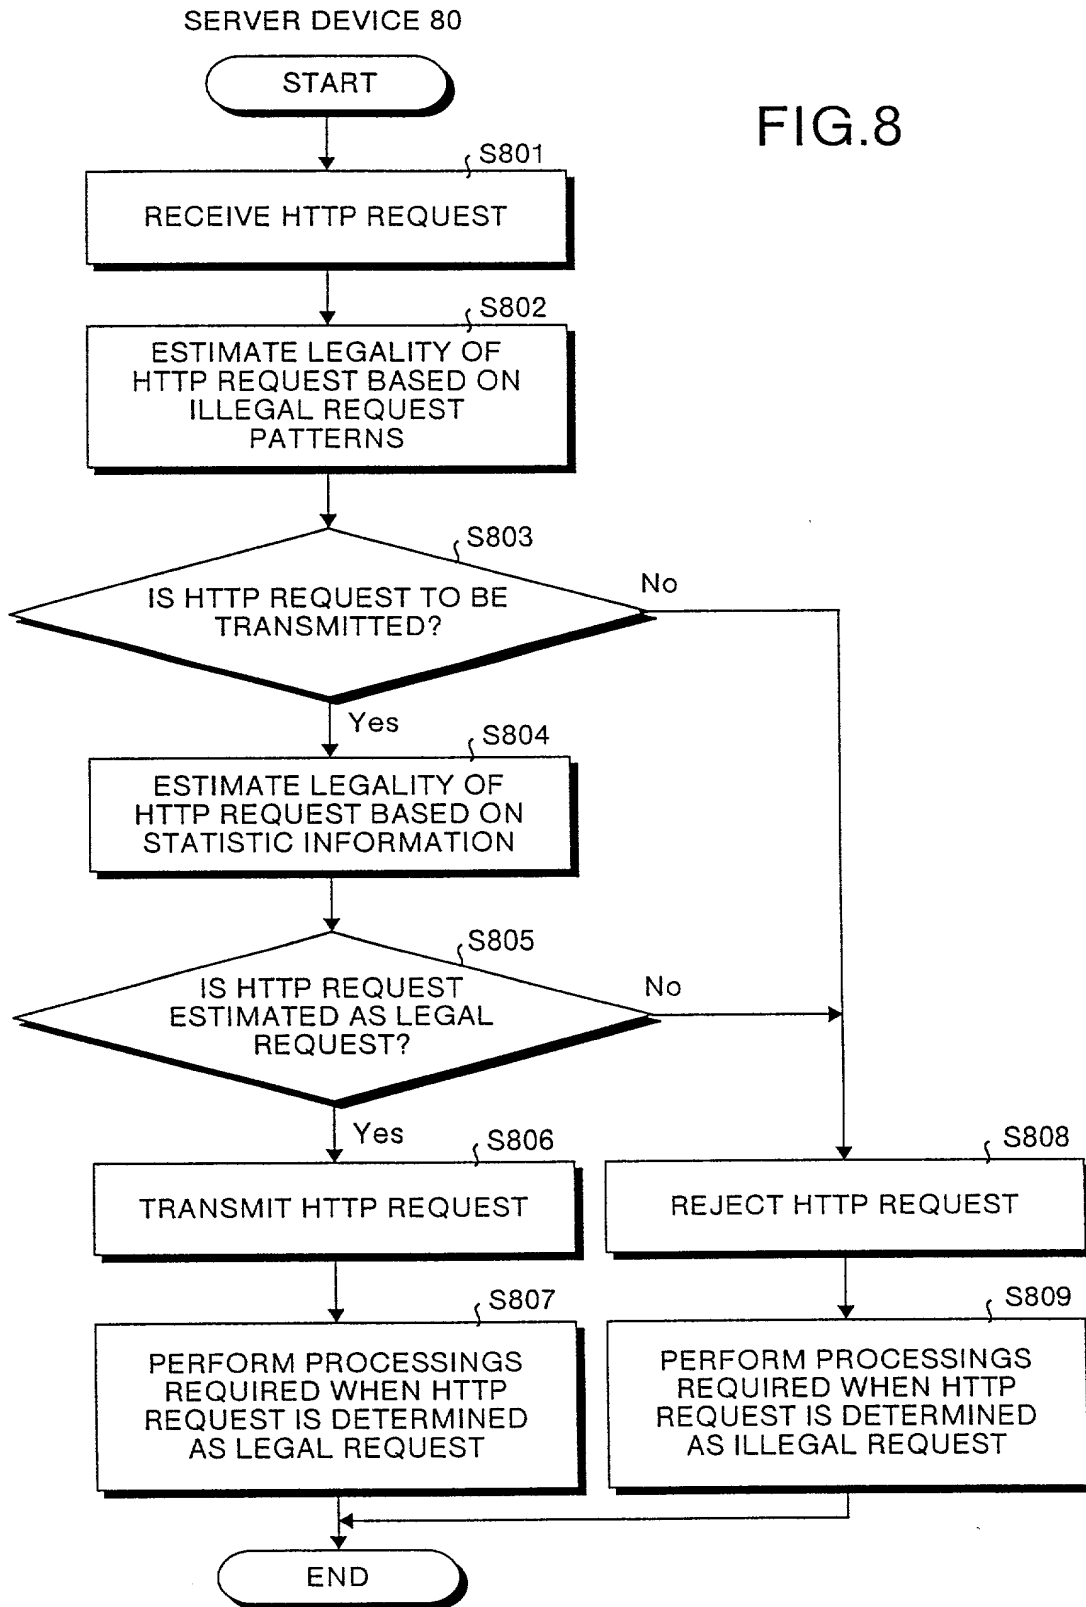


FIG.9

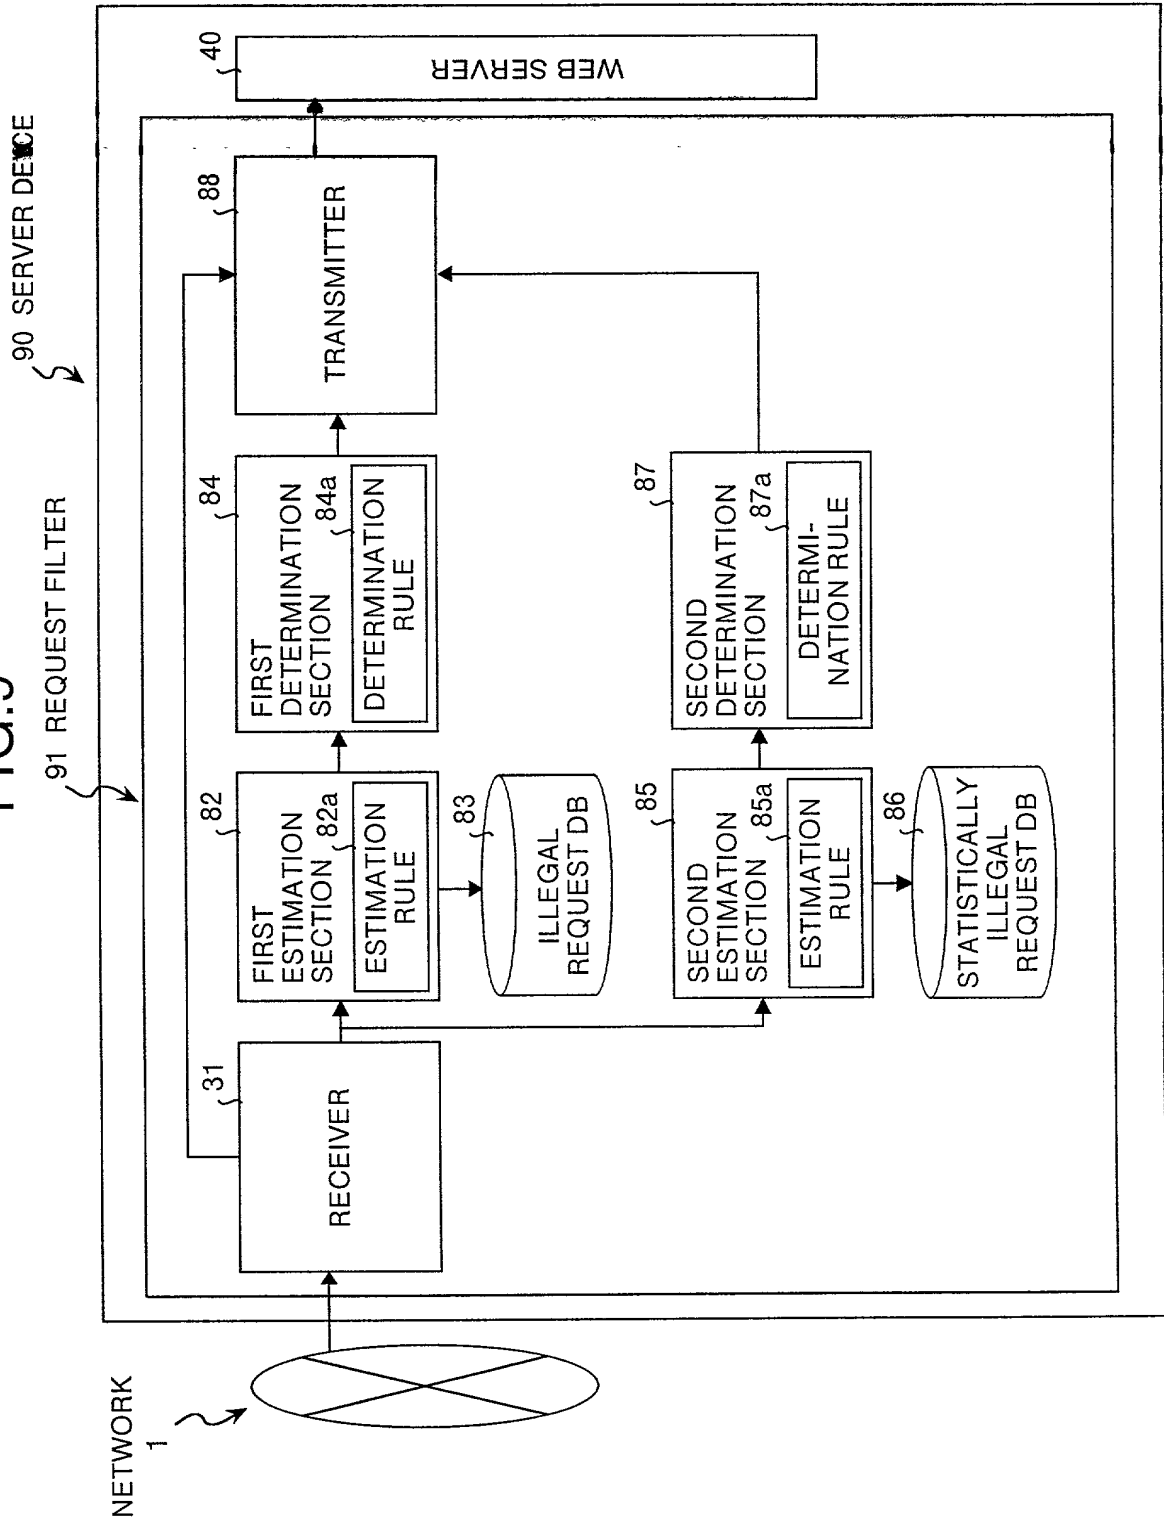

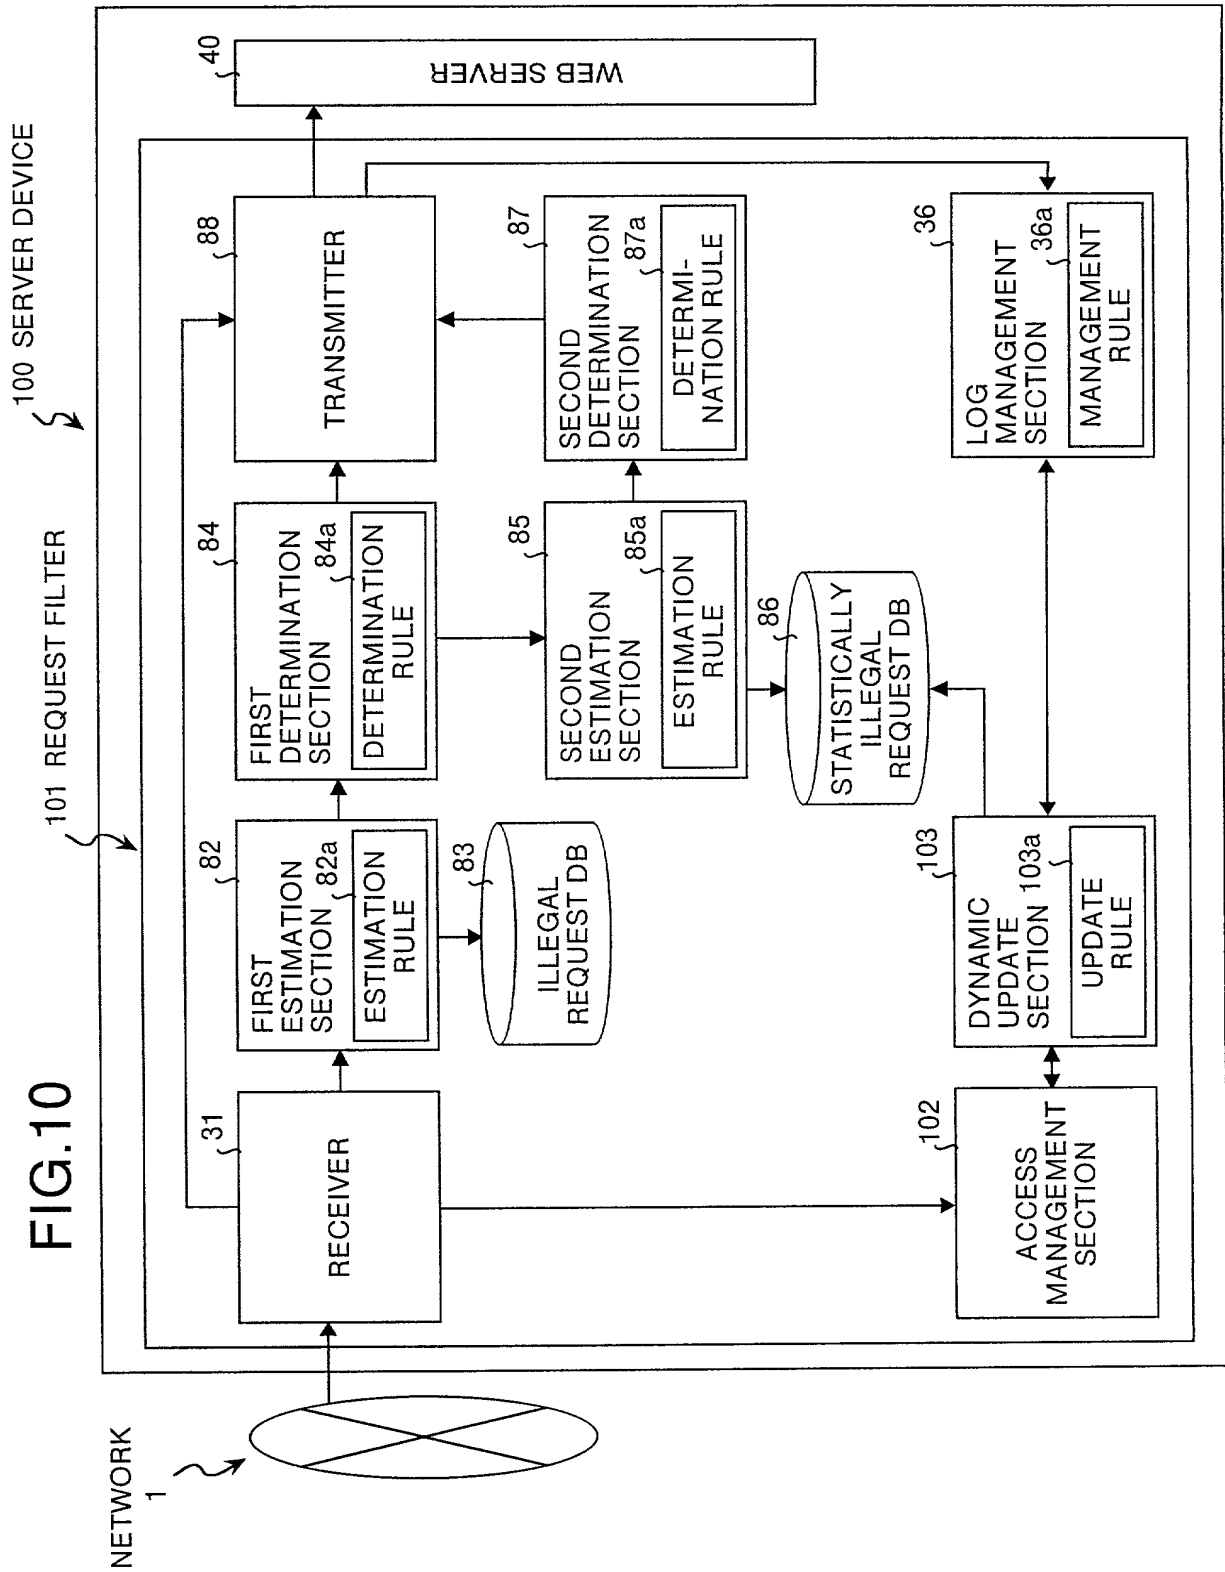

SERVER DEVICE 110

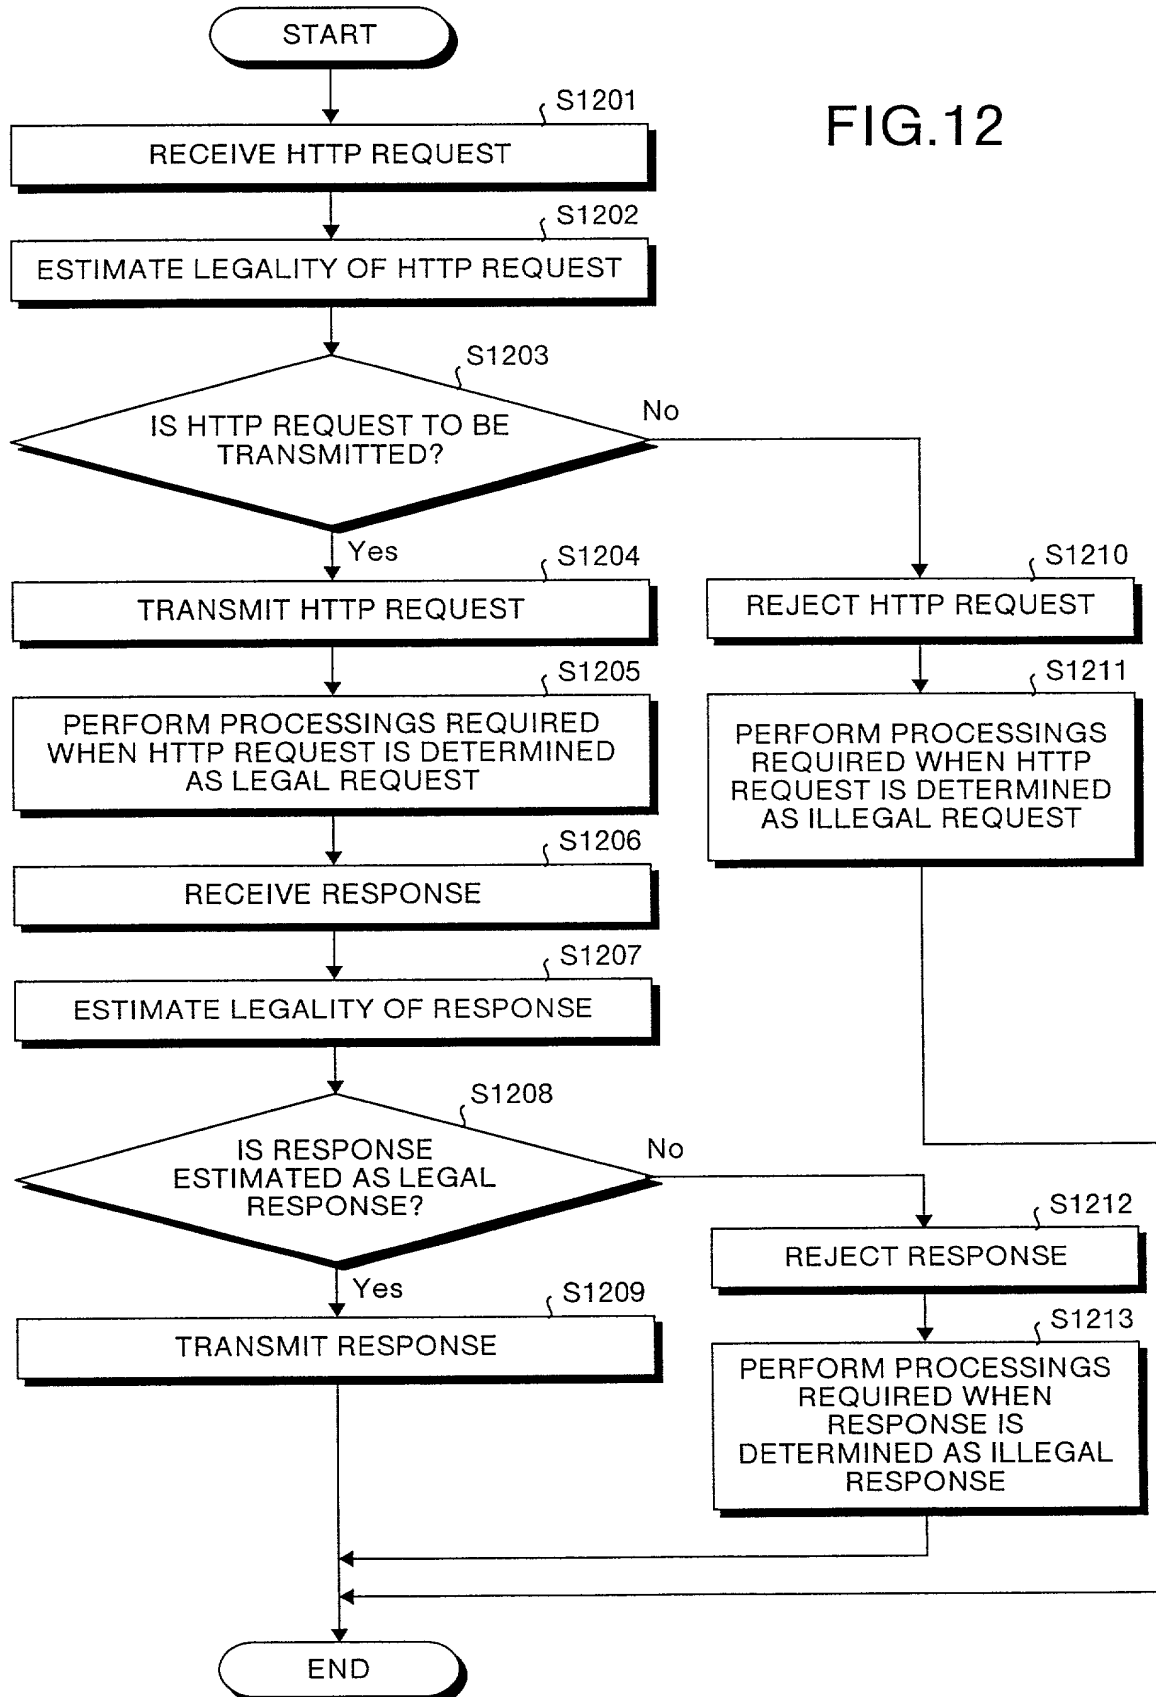


SERVER DEVICE

FIG.13

REQUEST FILTER

121

120

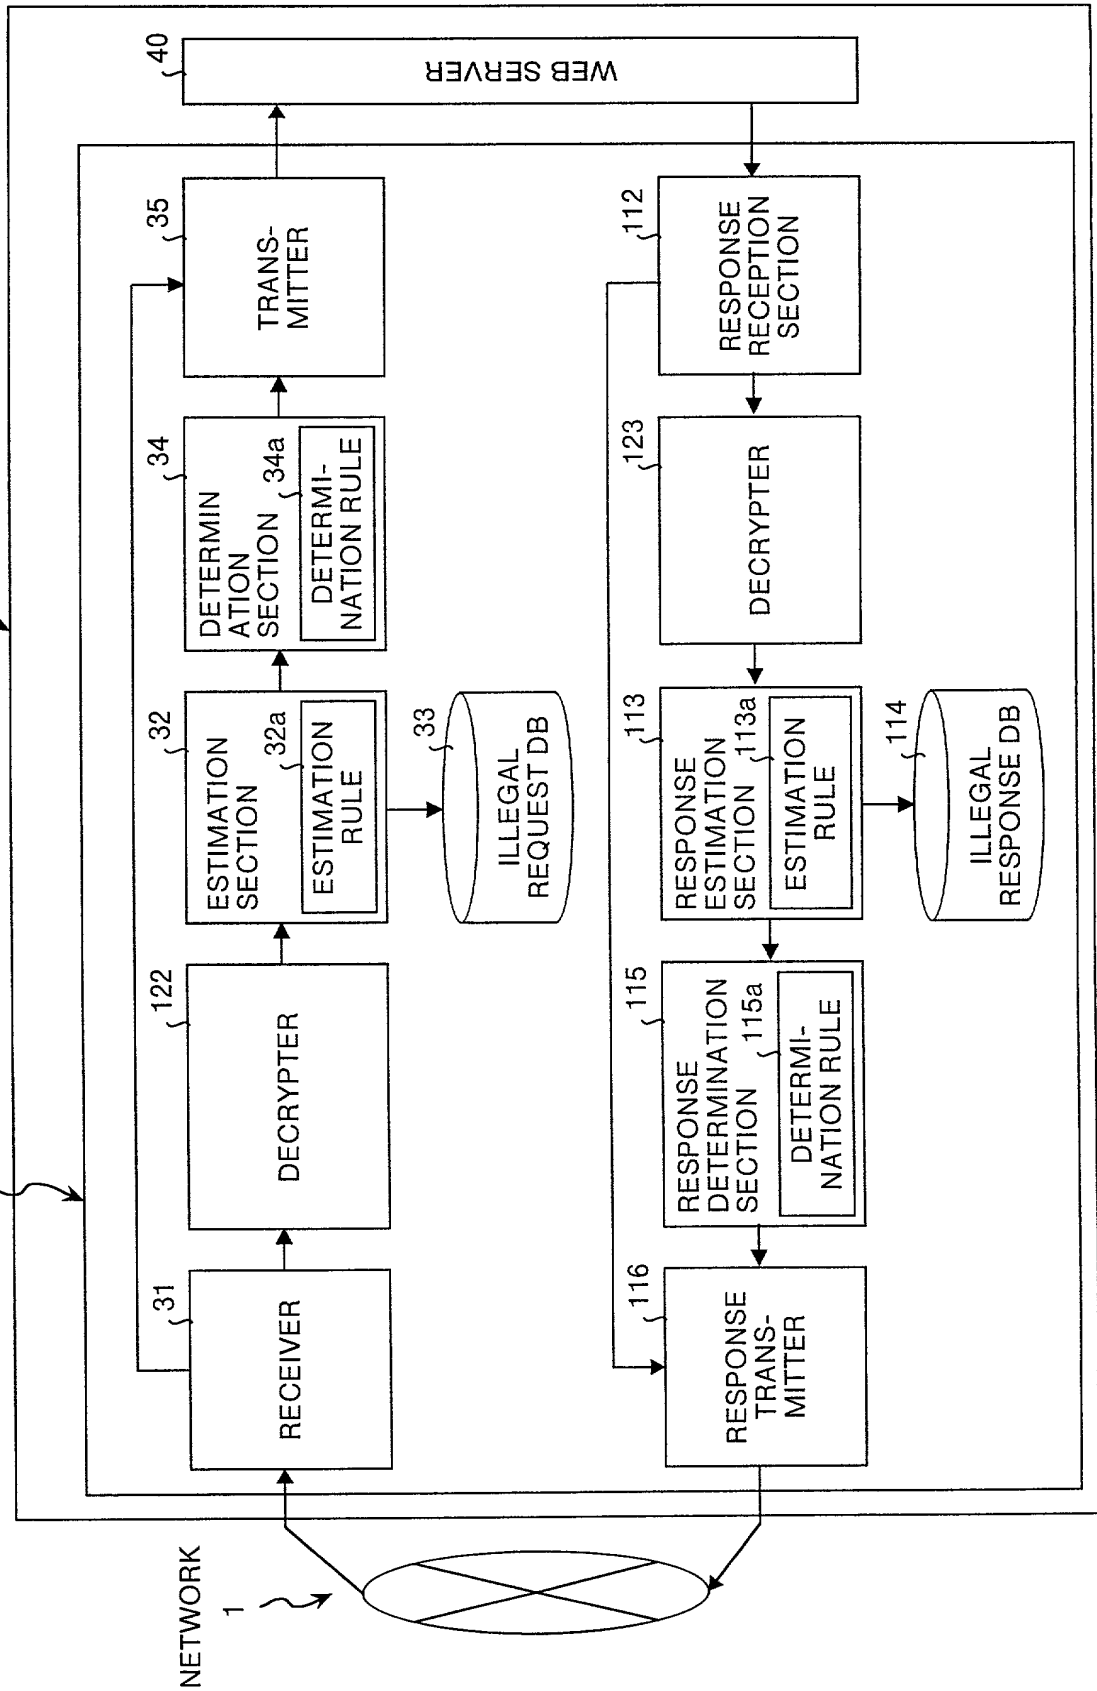

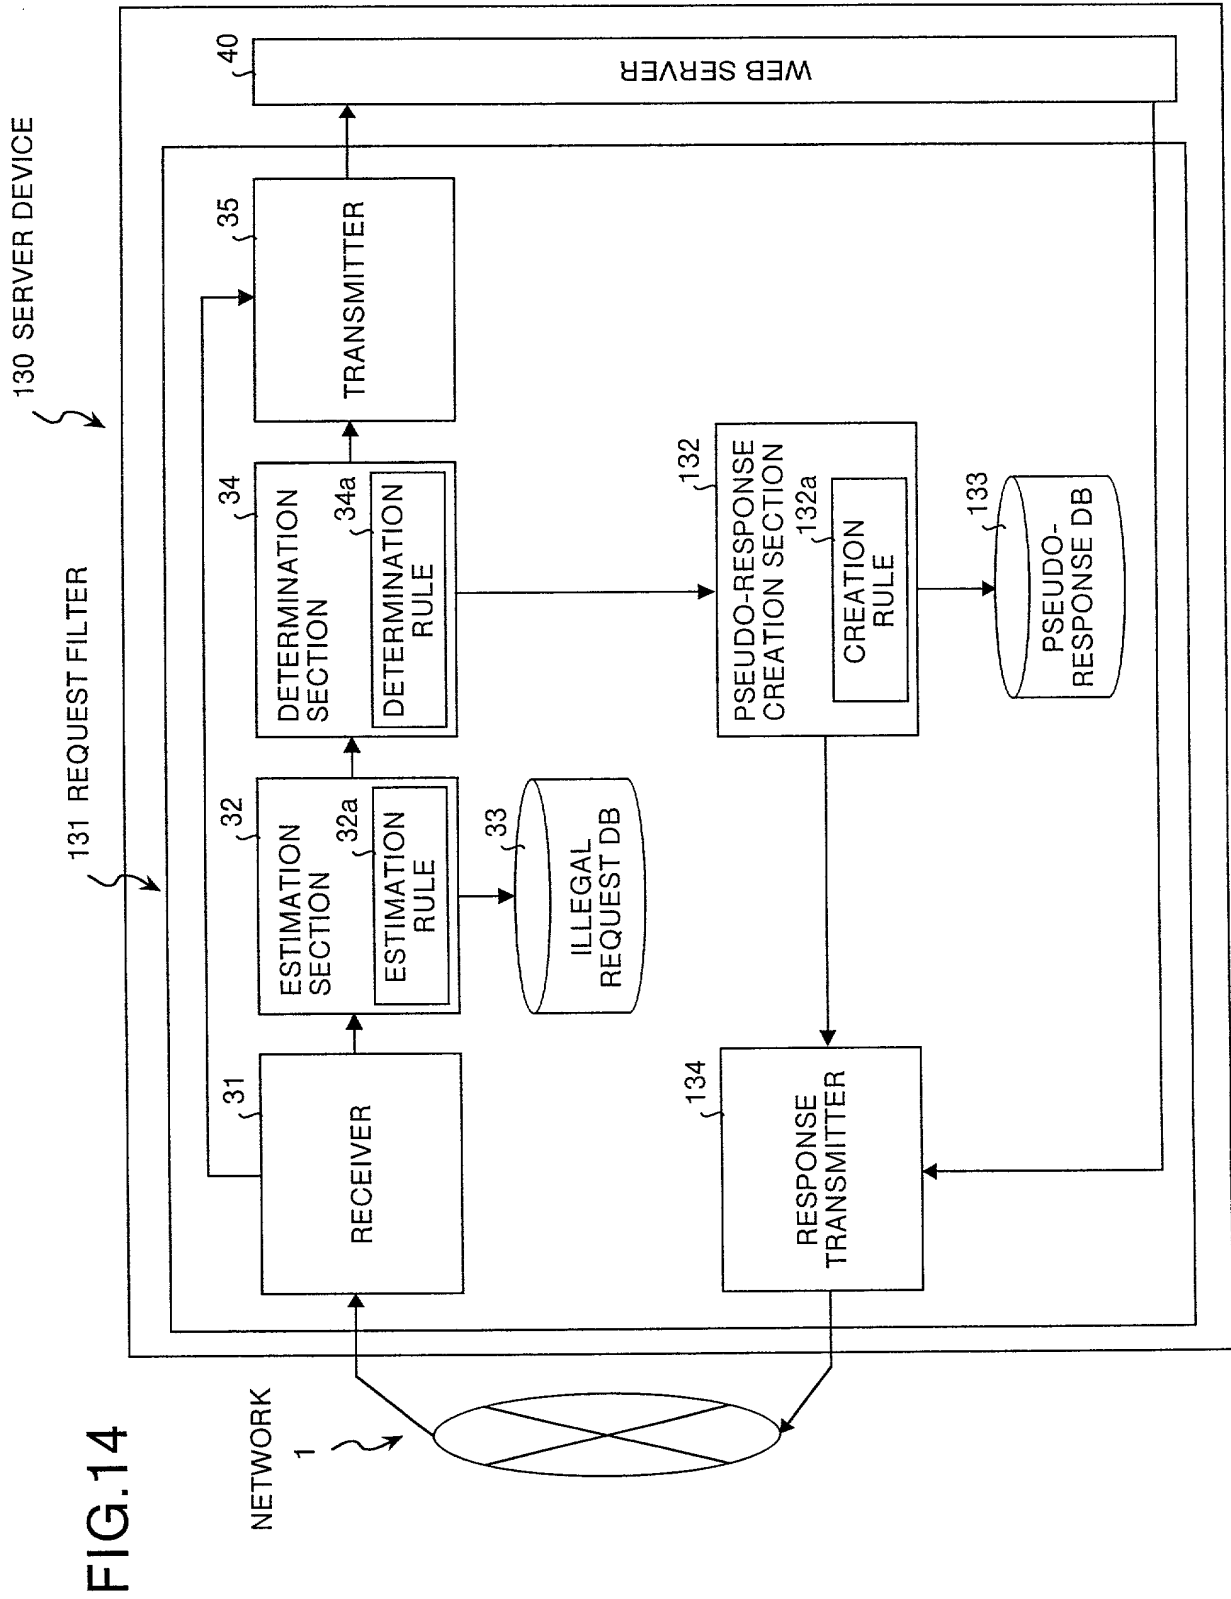
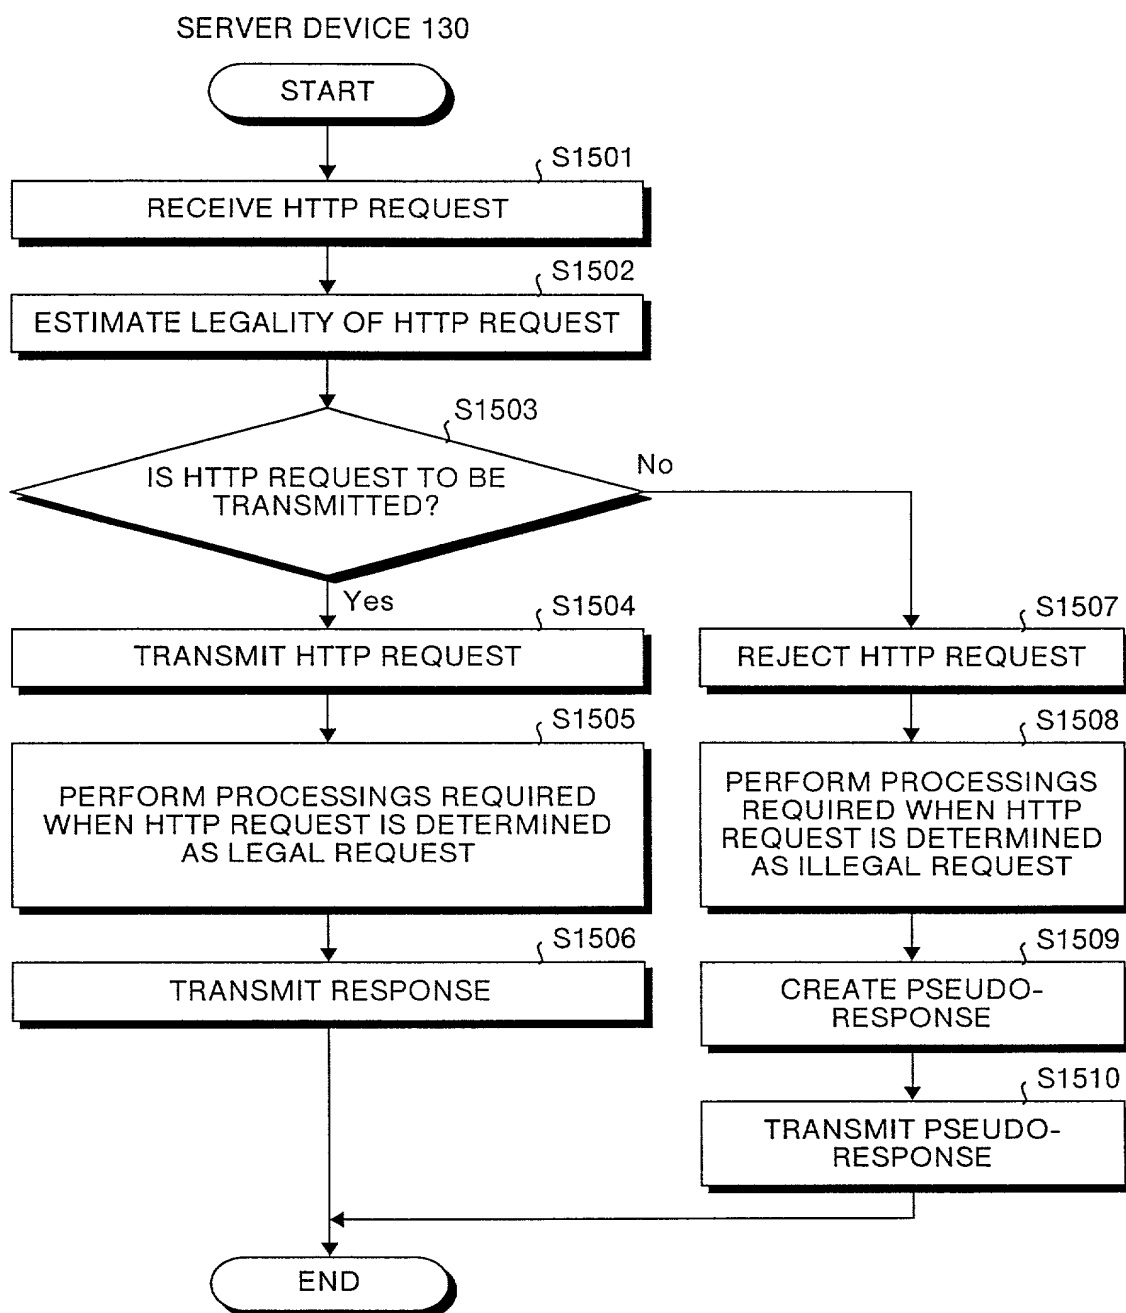


FIG.15



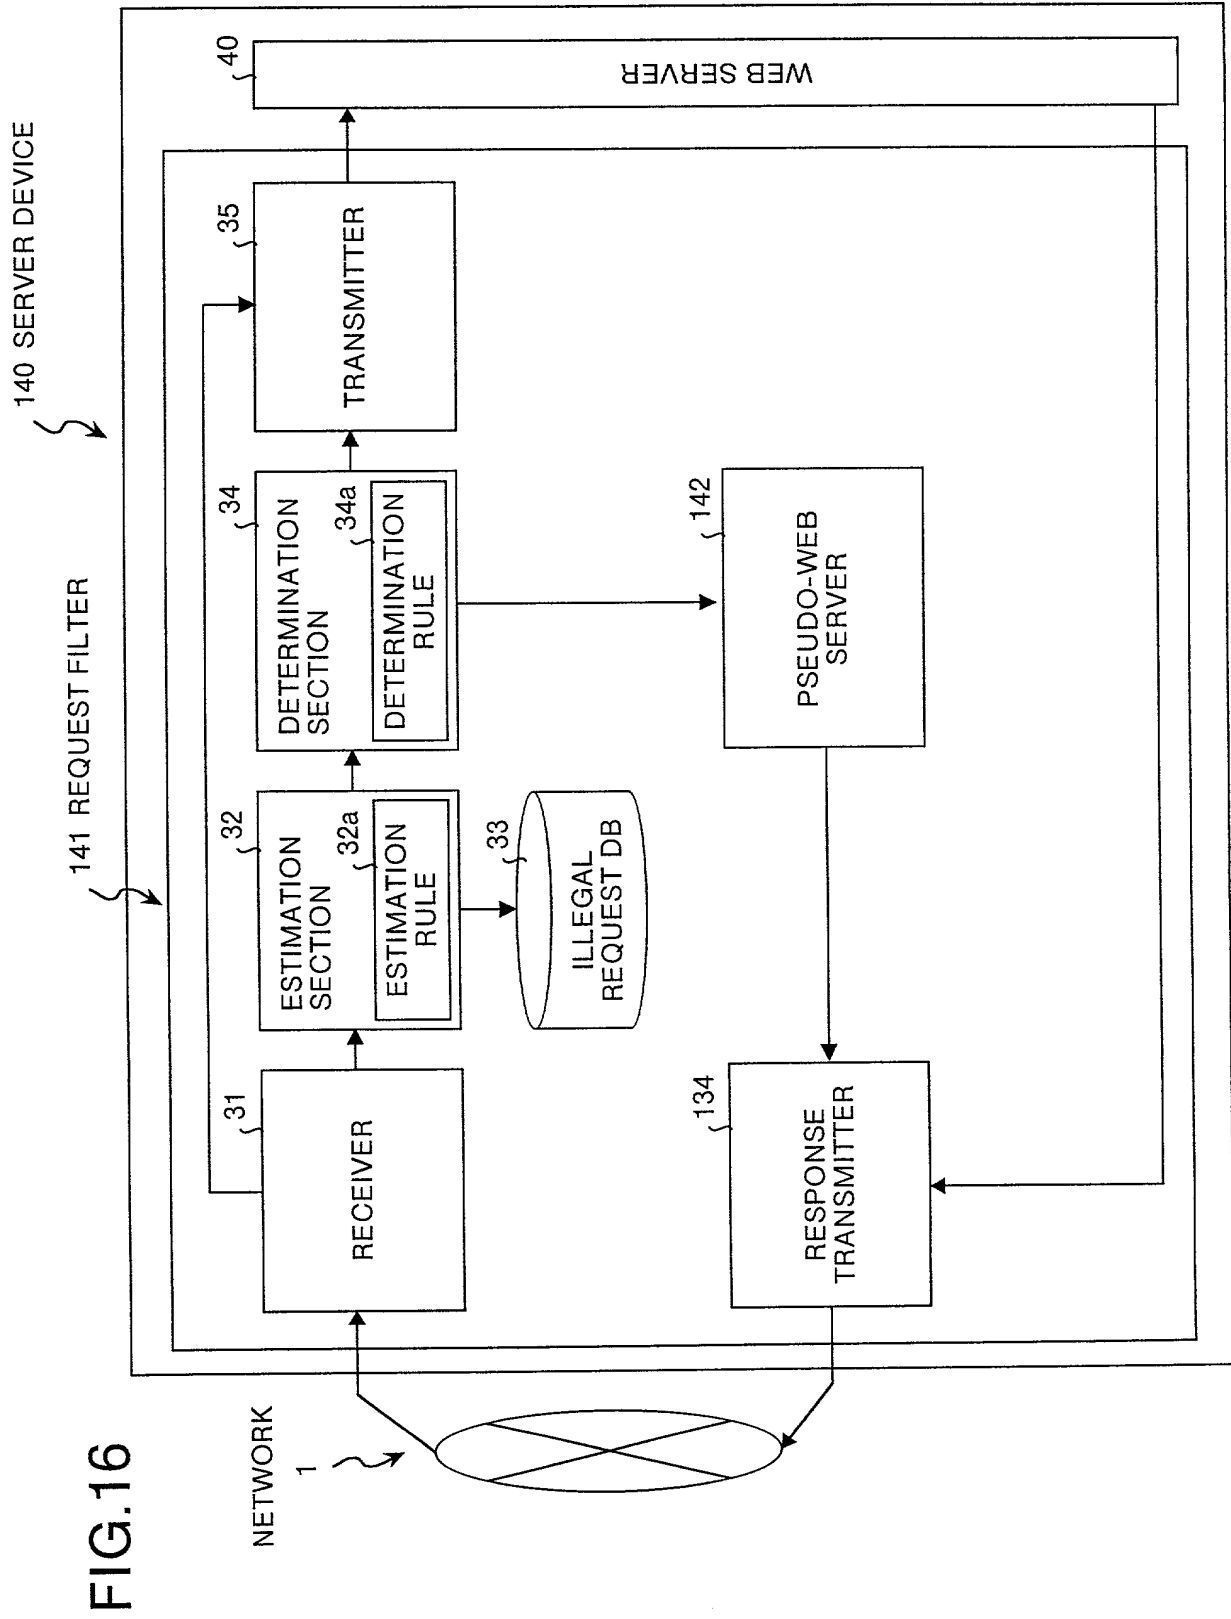


FIG.17

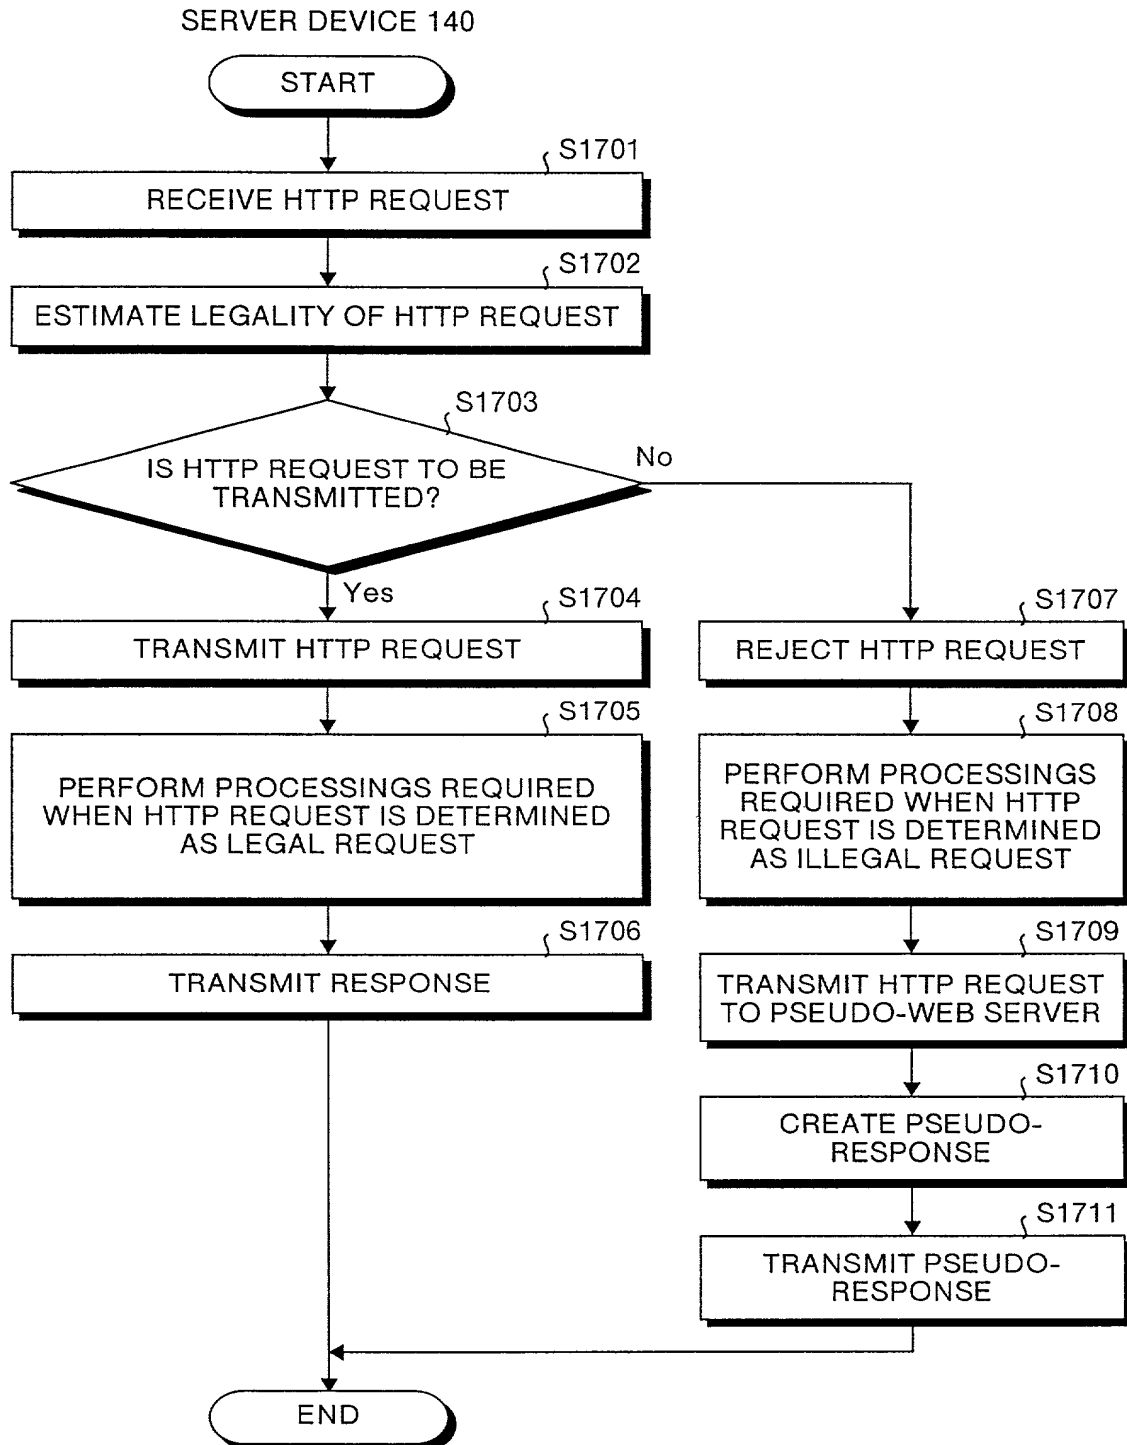


FIG. 18

